

ScanMobile™ 130100

MOBILE X-RAY INSPECTION SYSTEM



Feature Highlights

- Mobile, flexible system
- Incorporates HI-SCAN 130100
- Heat insulated body
- Air-conditioner (option)
- Integrated power generator (option)
- Penetration up to 30 mm steel (typical)
- Film safe up to ISO 1600 / 33 DIN

ScanMobile is a mobile X-ray inspection system using a self-propelled vehicle (chassis) with an especially manufactured body. The X-ray inspection system HI-SCAN 130100 is integrated.

The ScanMobile has been designed for places where luggage, freight or mail is loaded or unloaded and has to be checked for customs or security purposes.

A heat-insulated body and an optionally installed powerful air-conditioner and heating system ensure optimum operation regardless of the climatic conditions.

To establish operation at AC mains, an integrated power generator is incorporated as an option to supply the electrical devices independent of a mains source.

Fast and easy loading and unloading of items to be inspected is guaranteed by means of a powerful motorized conveyor at the input side and a heavy duty roller conveyor at the output. Both of them can be folded up into the vehicle. The height is adjustable to adapt both devices to the requirements of the operating area.

The operator space is provided with all necessary equipment to control the scanning process, e.g. monitor, keyboard, control panel with indicators and optionally an intercom system.

HI-SCAN 130100 General Specifications **(refer to sheet 95588232 for more information)**

Tunnel dimensions	1310 (W) x 1015 (H) [mm] • 51.6" (W) x 39.9" (H)
Max. object size	1300 (W) x 1000 (H) [mm] • 51.2" (W) x 39.4" (H)
Conveyor height ¹⁾	approx. 350 mm [13.8"]
Conveyor speed at mains frequency	0.24 [m/s]
50 Hz / 60 Hz	
Max. conveyor load even distributed over the whole conveyor	250 kg [551 lbs]
Conveyor system	integrated feed-in conveyor (length approx. 1.5 m [59.1"]) HD discharge roller conveyor (length approx. 1.3 m [51.2"]) fold down in horizontal position for operation
Resolution (wire detectability) ³⁾	standard: 36 AWG (0.13 mm) • typical: 36 AWG (0.13 mm)
Penetration (steel) ³⁾	standard: 26 mm • typical: 30 mm
Film safety	guaranteed up to ISO 1600 [33 DIN]
Duty cycle	100 %, no warm-up procedure required
Anode voltage	160 kV cp

ScanMobile 130100 General Specifications

Vehicle	Mercedes Sprinter / Iveco Daily
Body	thermo body in sandwich technique
Operating- / Storage- Temperature	-10° to +40°C / -20° to +60°C standard -10° to +50°C / -20° to +60°C option - premium warm package -20° to +40°C / -20° to +60°C option - premium cold package
Safety	indicator X-ray on; emergency stop system
Power supply ⁵⁾	external power supply 220 - 240 VAC +10% / -15%; 50 Hz or 60 Hz ± 3 Hz; power cable for external power supply; power distribution
Additional features	illumination accessories
Options	motorized discharging conveyor; voltage stabilizer; rapid heater; air-conditioner ⁵⁾ ; video system for (dis-) charging area; 19" monitor ⁵⁾ ; rear view system; extended temperature range; cupboard; power generator (different models on request); intercom system; printer

Vehicle Mercedes Sprinter General Specifications



Standard vehicle ⁵⁾	Mercedes Benz Sprinter 515 CDI 4x2
Vehicle (option) ⁵⁾	Iveco Daily 40C15 / E3V
Engine	diesel; 4 cylinders
Injection	direct injection
Total displacement	4249 cm ³
Output power • torque power	110 kW at 3800 rpm • 330 Nm at 1200 - 2400 rpm
Gross vehicle weight	5300 kg [11684.51 lbs]
Wheel base	4325 mm [170.27"]
Fuel capacity	75 l
Electrical system	2x 12 V
Options e.g.:	driver's cabin air-conditioner; auxiliary heating system; heat insulating glass; fog lamps; spoiler on top of driver cabin; reinforced battery; receiver with cassette recorder / CD; electric powered windows lift; window in entrance door of operator cabin (further options on request)

¹⁾ from vehicle floor / approx. values

⁴⁾ extended temperature range on request

³⁾ Conds.: steel step wedge, CU wires, belt speed 0.24 m/s

⁵⁾ different values / types optional

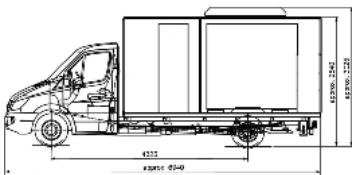

Example: Mercedes Benz Sprinter 515 CDI 4x2
Dimensions depending on the options [Air conditioner, tyres, conveyor length...].
Modification of manufacturer reserved.

For product information, sales or service, please go to www.smithsdetection.com/locations

Smiths Detection Germany GmbH, Im Herzen 4, 65205 Wiesbaden, Germany
Modifications reserved. 95589780 02/05/2022 © Smiths Detection Group Ltd. - In some cases, the figures contain options
ScanMobile is a trademark of Smiths Detection Group Ltd.